

FIG. 1 is a perspective view of the device in a straight configuration, showing the handle, the shaft, and the connector assembly. The handle is labeled 1, the shaft is labeled 2, and the connector assembly is labeled 3. The shaft has a break in the middle, indicated by two parallel diagonal lines. The connector assembly has a cylindrical body with a flange and a threaded section.

Fig. 1

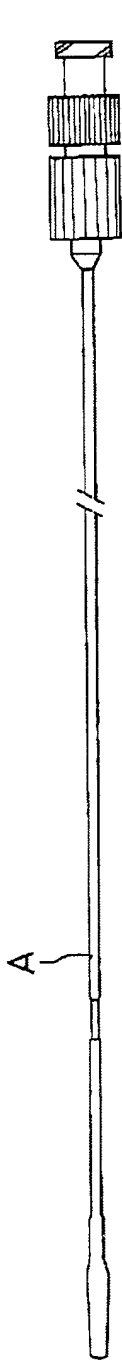


Fig. 2

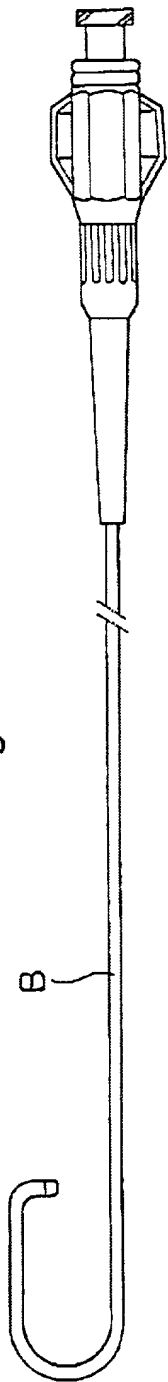
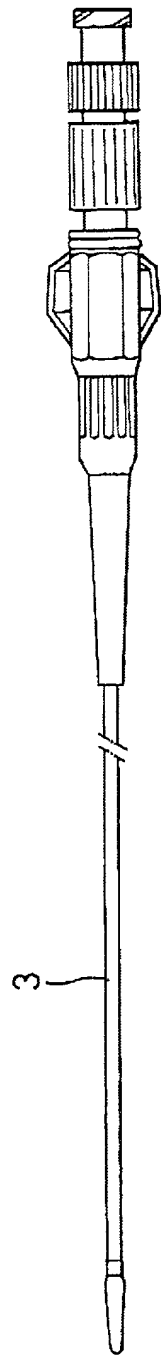


Fig. 3




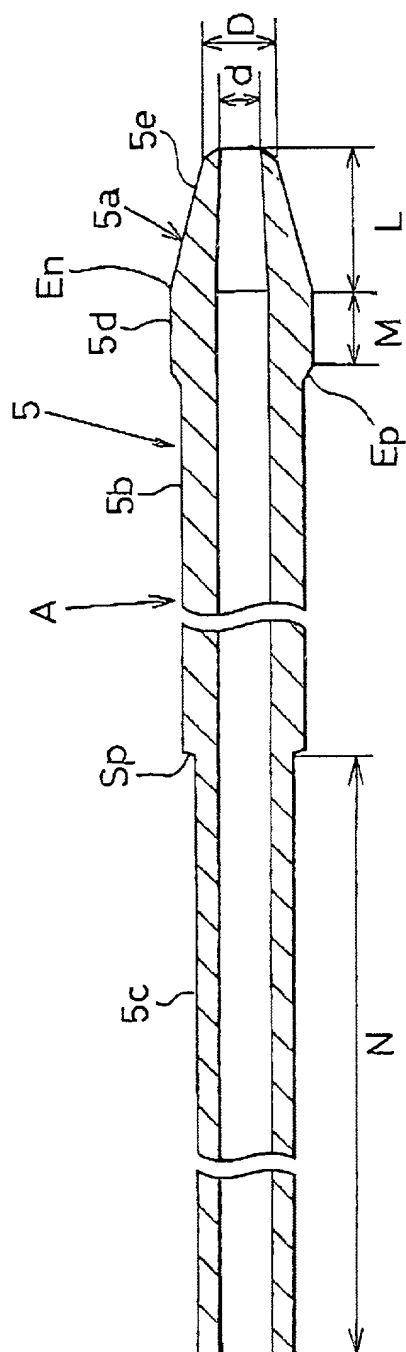


Fig. 4


FIG. 5 is a perspective view of the device 100 in a closed position.


Fig. 5

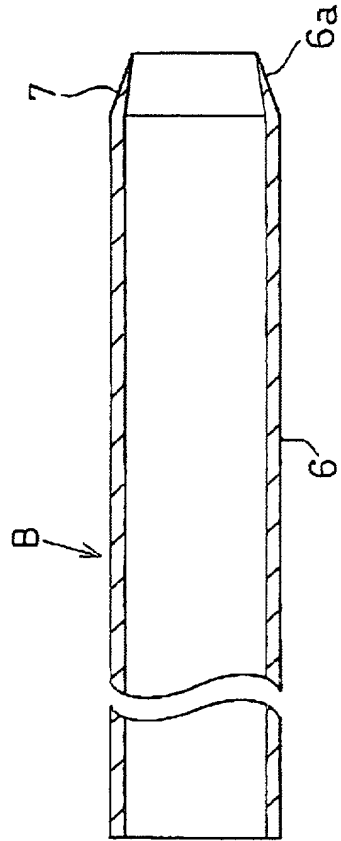

0527601296


Fig. 6

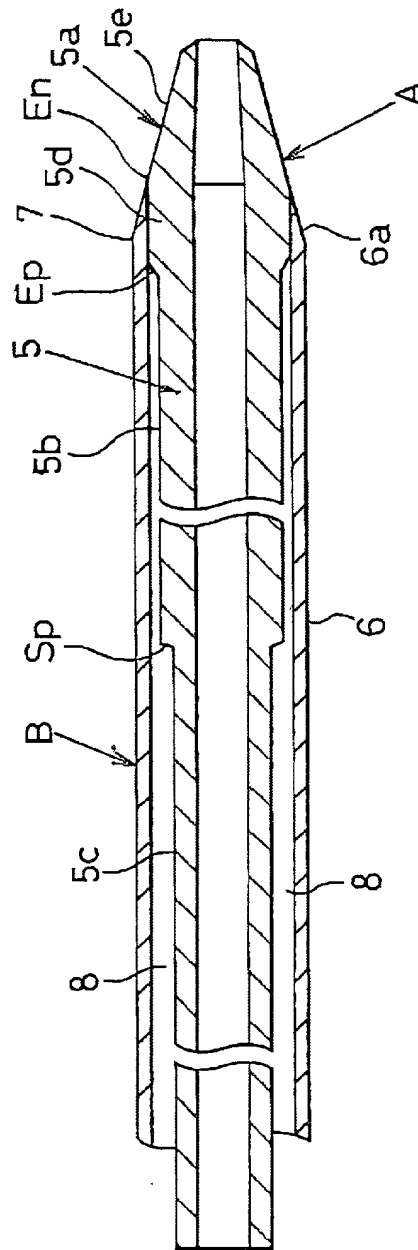

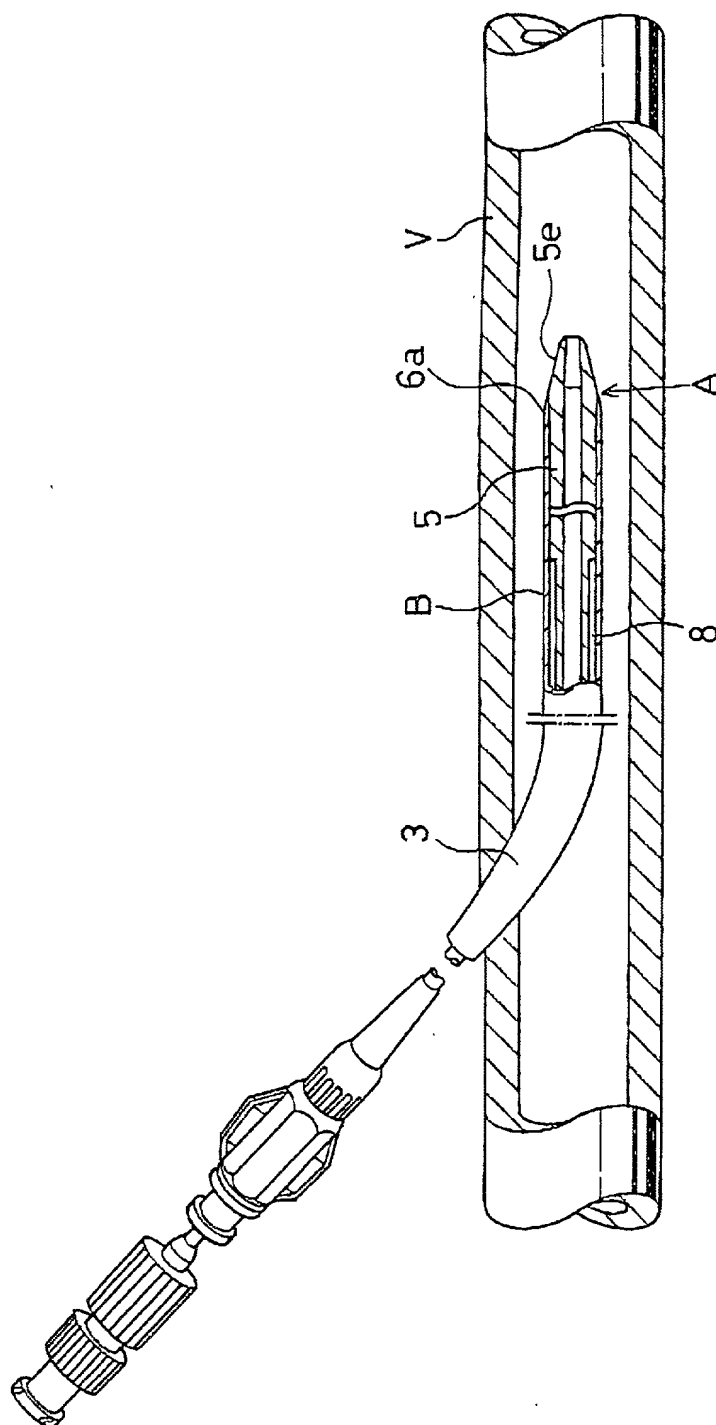

Patent No. 6,826,000

Fig. 8

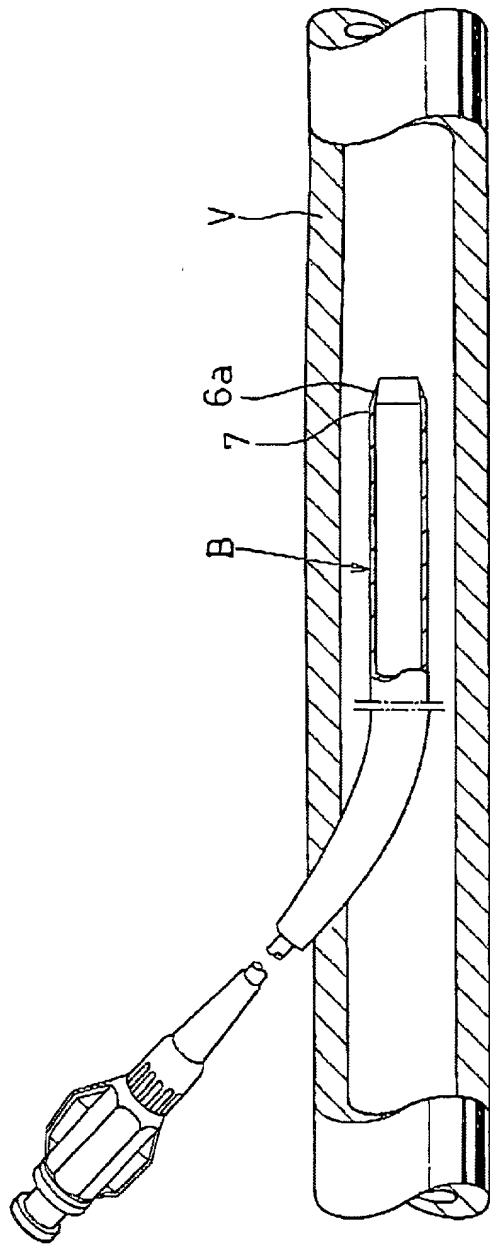

0527601296

Fig. 9

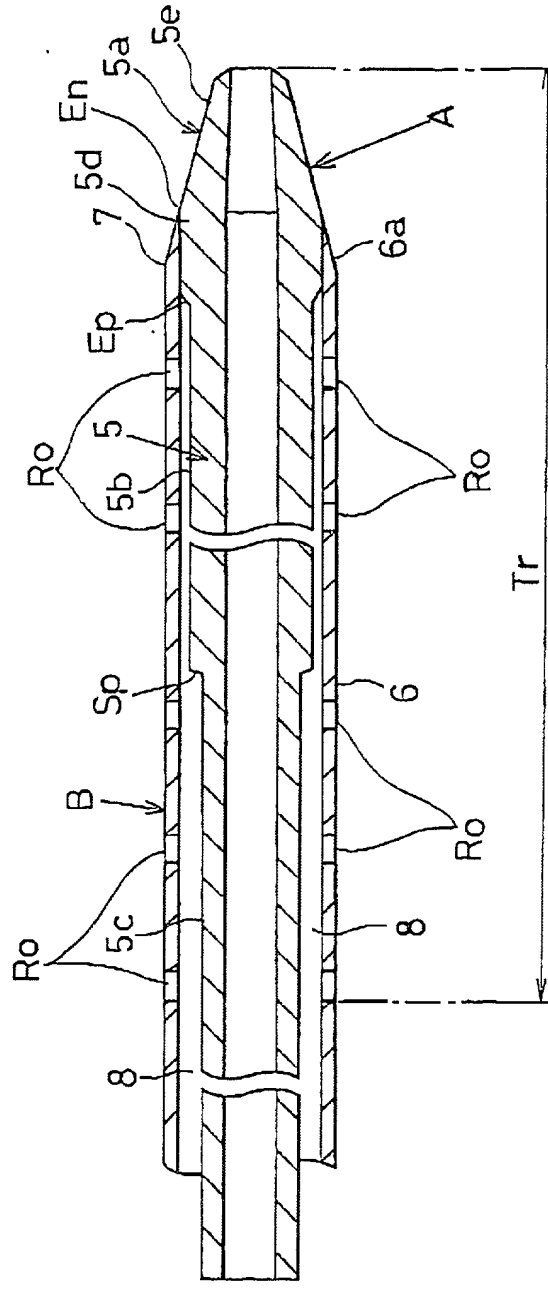


Fig. 10

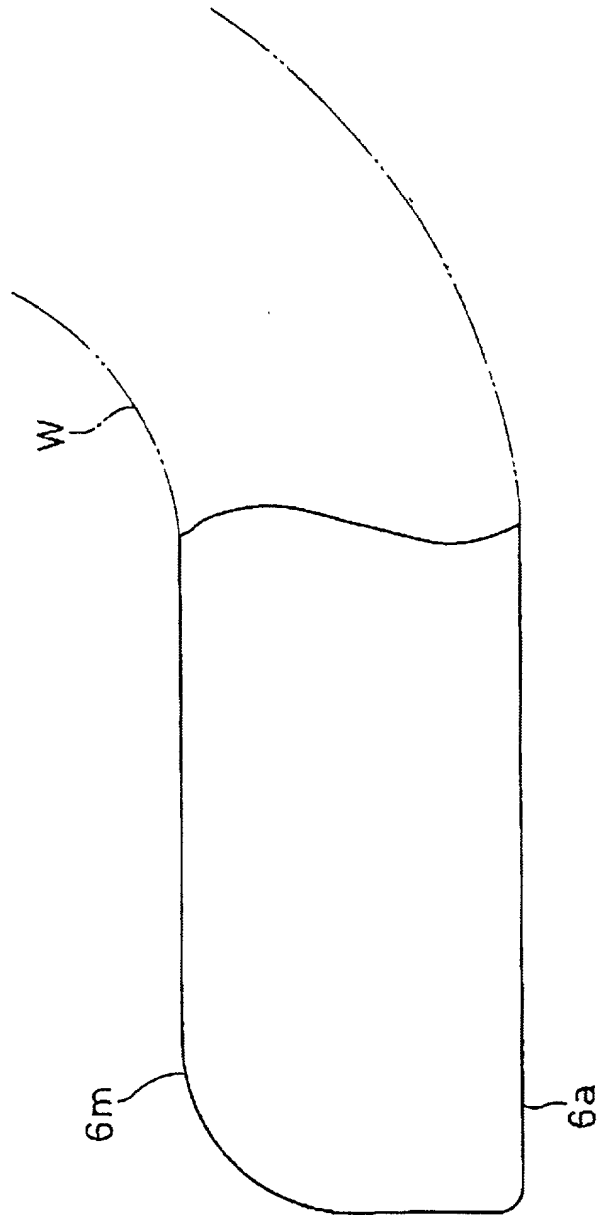
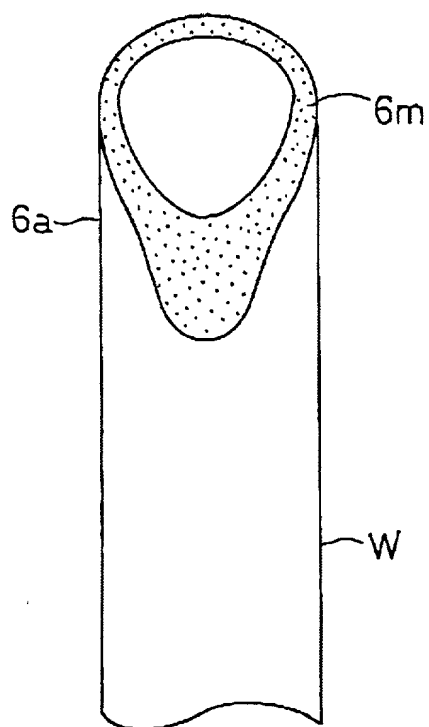




Fig. 11



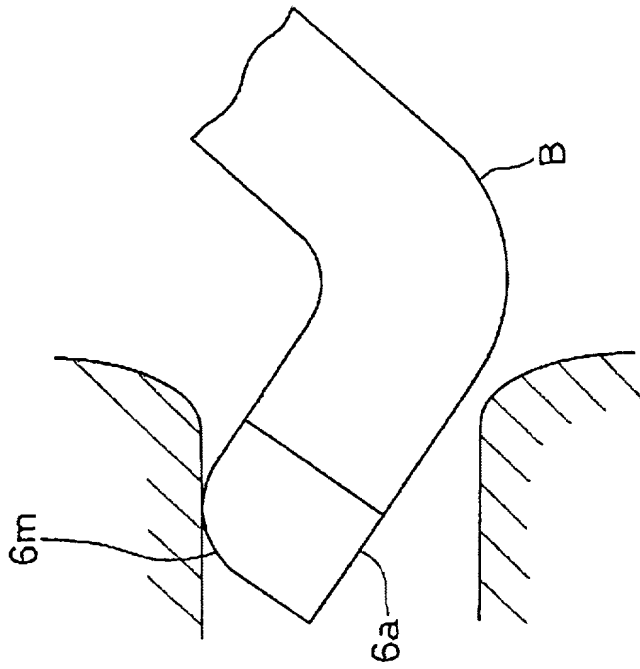


Fig. 12

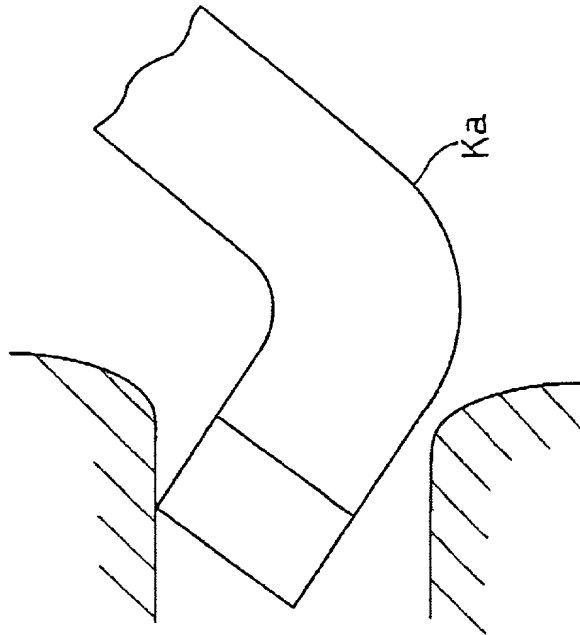


Fig. 13

0527601296

Fig.14

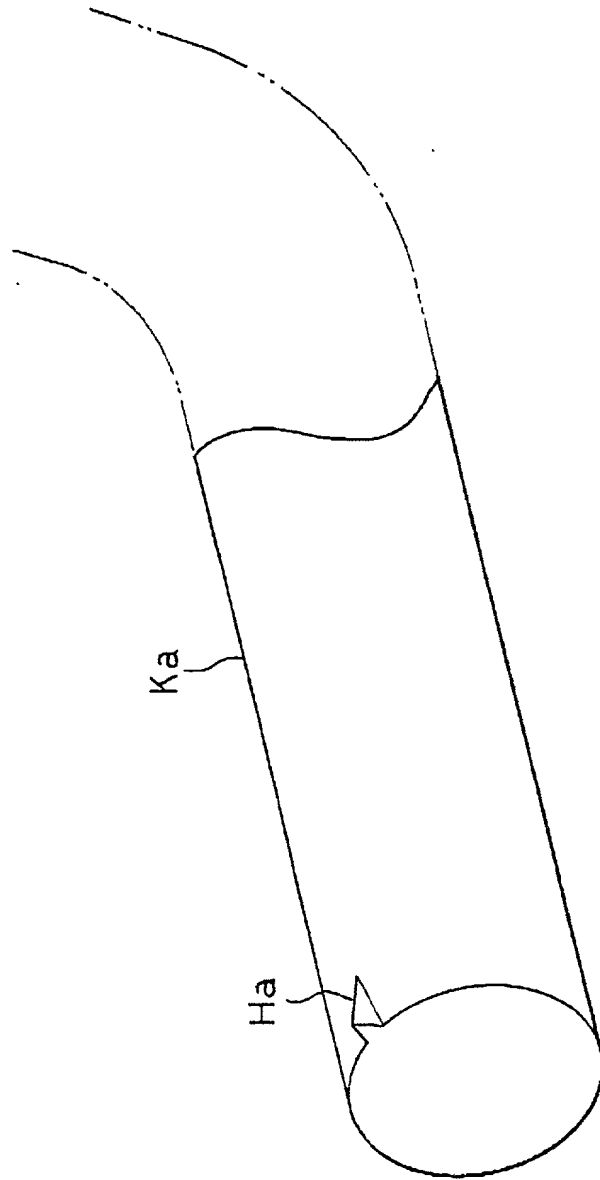


Fig.15

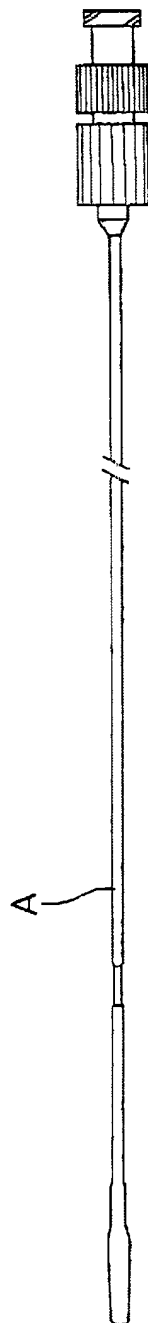


Fig. 16

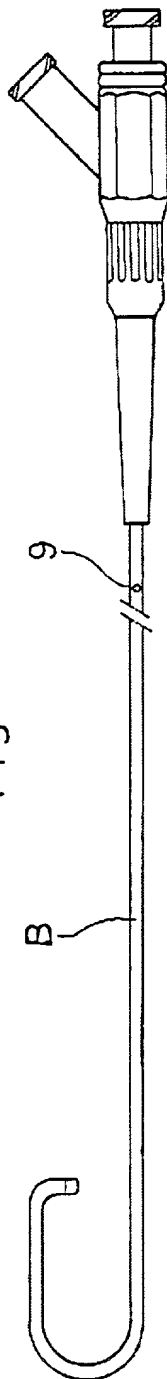


Fig.17

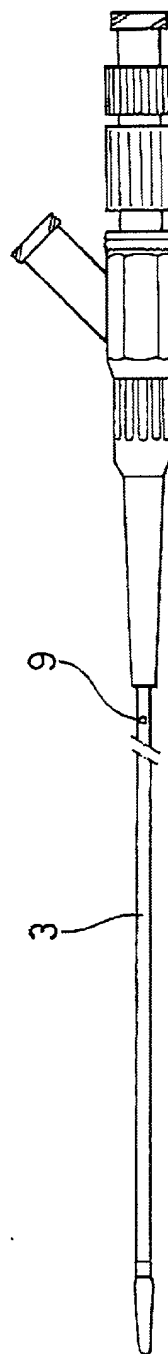






Fig. 20

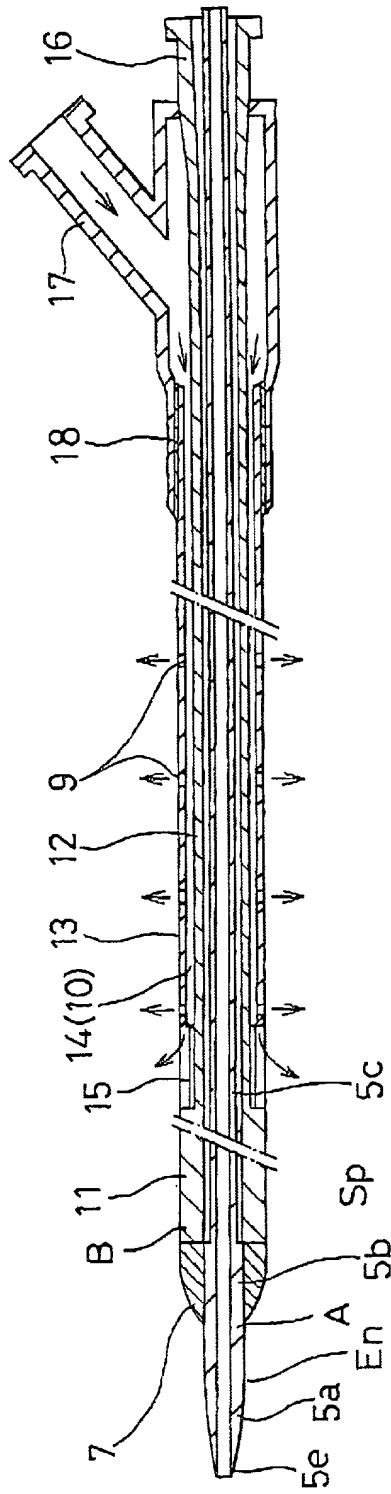


Fig. 21

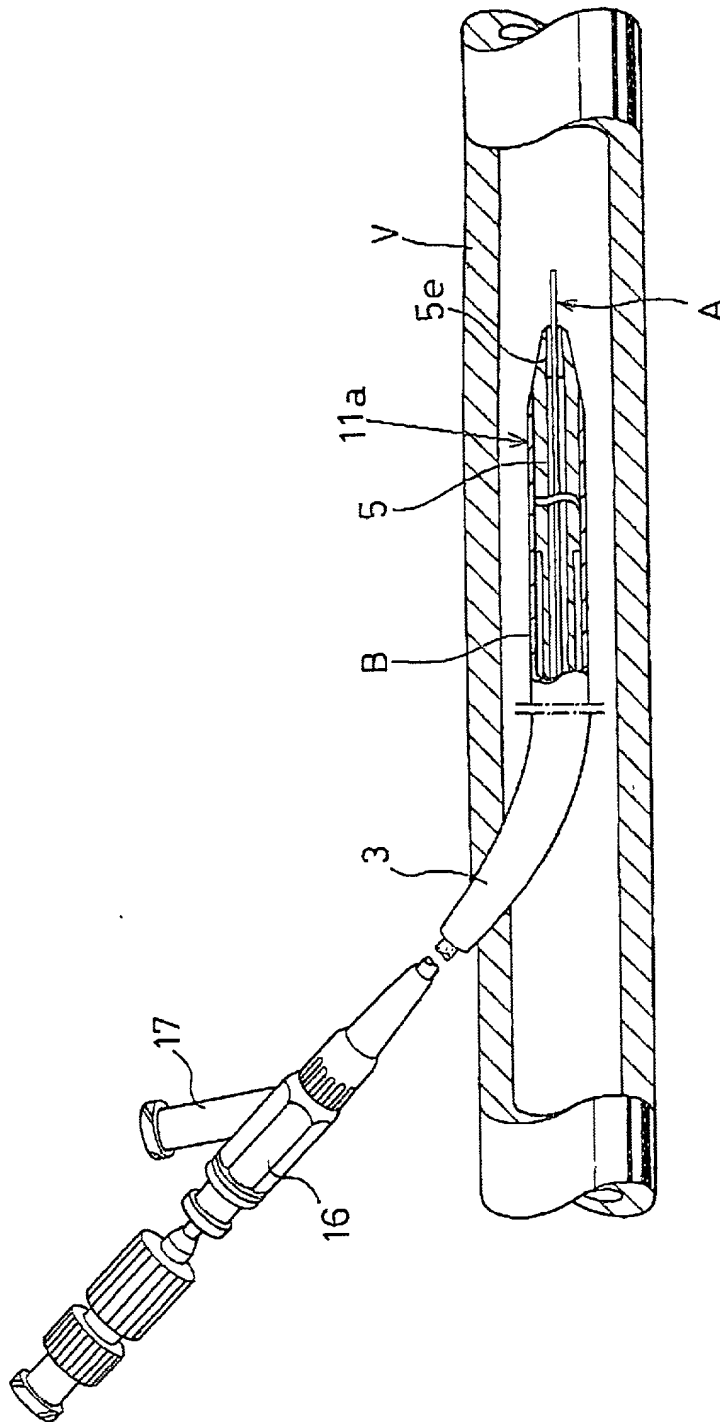




Fig. 22

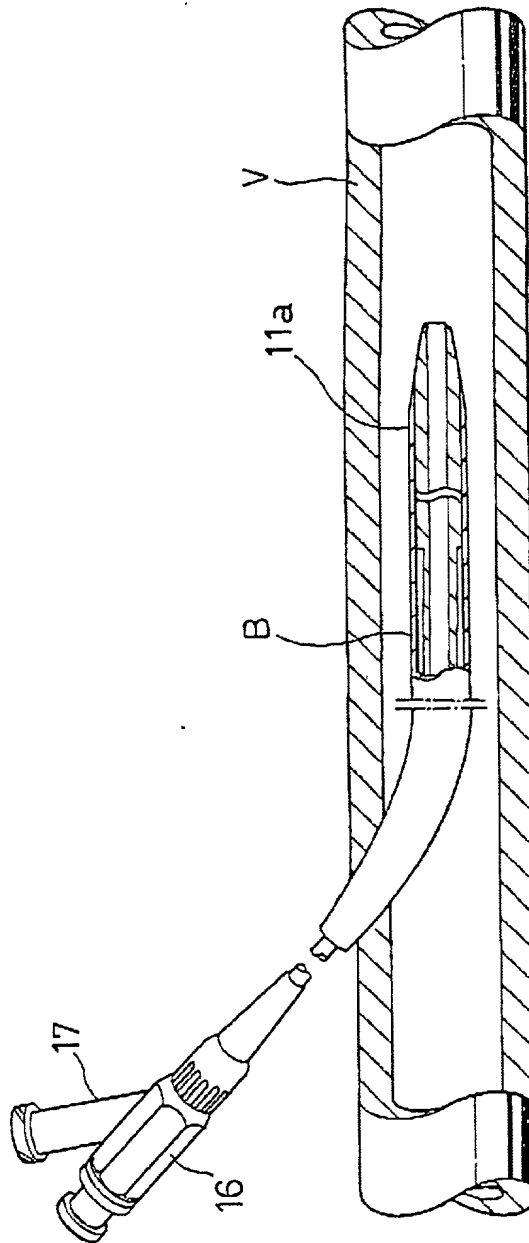


Fig. 23

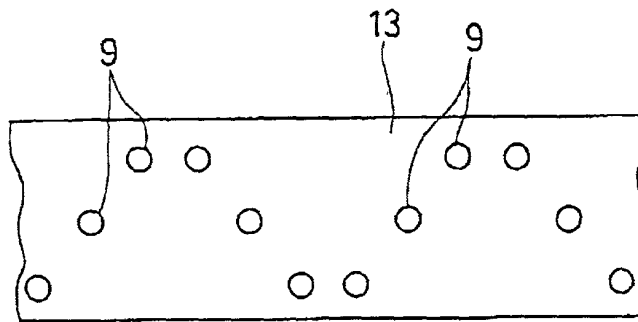


Fig. 24

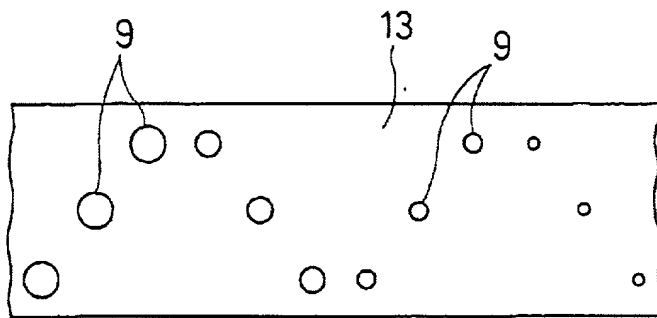


Fig. 25

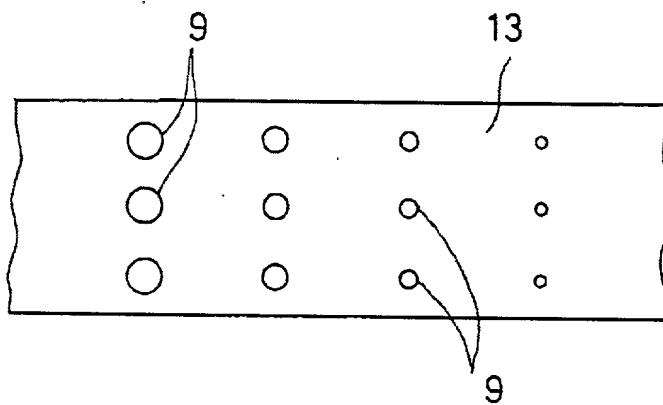


Fig. 26

